


LRA 400
Technical documentation
Date of issue: 03/2020



ULT 400

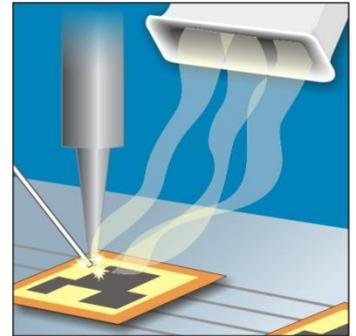

**Clean air,
high performance.**

**LRA-series, mobile
air extraction and
filtration units for
soldering smoke.**



Air handling equipment for environmental and health protection

Technical documentation

Air extraction and filtration unit



LRA 400

Use and application



soldering smoke

The **LRA 400** is suitable for the extraction and filtering of soldering smoke. Soldering processes produce large quantities of soldering smoke (flux residues, gases and vapours as well as other substances) which can be filtered by the LRA 400. The material of the filter elements ensures effective filtering out of the various dust particle sizes. An expanded metal filter and a combination of filter mats with the filter classes M5 and F7 protect the following filter stages from prematurely saturation. The following H13-filter separates even the smallest particles from the polluted air. At the adsorption filter a thick layer of activated carbon is holding back gases and fumes effectively.

Examples

- ⇒ hand soldering
- ⇒ machines and devices for soldering

ULT 400 mobile air extraction and filtration unit

mobile unit,
with storage filter system
robust steel housing, powder coated
RAL 7035 light grey / RAL 5017 traffic blue



Filter system:

Storage filter system
Filters which are replaced once they are saturated.

Filter technology:

Main filter module

- (1) Expanded metal filter
metal knitting, spark protection filter
- (2) Filter mats M5/F7 in Replacement frame
filter classes: M5 medium dust filter and F7 fine dust filter
according to DIN EN 779
- (3) Particle filter H13
filter class: H13 HEPA-filter according to DIN EN 1822
- (4) Adsorption filter cassette A14
filter medium: activated carbon (14 kg)



Technical documentation


Air extraction and filtration unit



LRA 400

technical Data


Parameter	unit	MD.17	
Max. air flow	m ³ /h	1.000	
Max. vacuum	Pa	2.600	
Nominal capacity	m ³ /h / Pa	400 / 2.300	
Motor-nominal power	kW	0,70	
Nominal voltage	V	230	
Nominal current	A	3,5	
Frequency	Hz	50 / 60	
Protection class	IP	54	
Type blower		EC-blower	
Noise level (at 50 - 100%)	dB(A)	< 60	
Weight	kgs	95	
Air flow controller		yes	
Loaded particle filter indicator	optical	yes	
Operating hours counter	(1*)	optional	
SUB D9 interface	(2*)	optional	
Remote digital control		optional	
Air intake		2x Ø 100 mm take off, optional further Ø	
	position	upper backside of the unit	
	optional position	2x Ø 100 mm take off, optional further Ø on top of the unit	
Air outlet		air exhaust louver	
	position	lower rear side	
Width	mm	600	
Depth	mm	660	
Height	mm	900	
Length of power cable	m	5	
Filter system		filter system: storage filter	
		filter set consisting of:	
	(1)	Expanded metal filter	ULT 02.0.015
	(2)	Filter mats M5/F7	ULT 02.0.039
	(3)	Particle filter H13	ULT 02.0.041
(4)	Adsorption filter cassette A14	ULT 02.1.025	

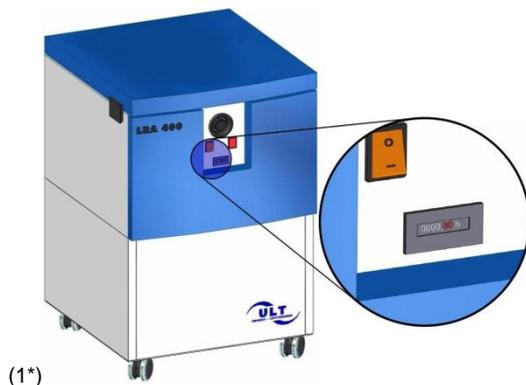

LRA 400



soldering smoke

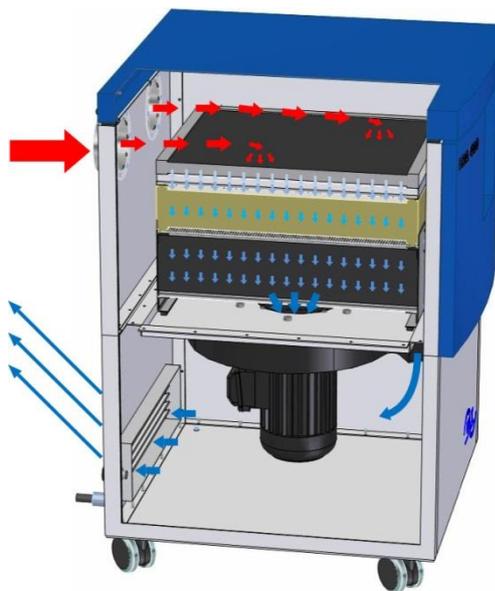

-  raw gas
-  filtration
-  clean gas

Functional principle:

At the **clean-air side** of the filter, a vacuum generator with a high pressure reserve produces a volume flow matched to the respective application. This volume flow can be individually and infinitely variably regulated by some units. Thus, the polluted air will be reliably extracted.

The **particles** are separated and held back at the first filtration level in multiple stages. **Gaseous and vaporous air pollutants** are separated (adsorbed) in an activated carbon filter.

The filtering effect of activated carbon is based on adsorption, i. e. an accumulation of substances (to be filtered out) on the surface of the activated carbon. During this process there are no chemical reactions and changes of the captured substances. The construction of the filter elements underlies the volume flow of the unit; the contact time is based on a medium adsorption reaction.




Storage filter system

Filters which are replaced once they are saturated.

Filtration set complete


- | | |
|---|---|
| (1) sublimation / spark protection | Expanded metal filter |
| (2) fine dust filter | Filter mat M5 |
| (3) fine dust filter | Filter mat F7 |
| (4) particulate filter | Aerosol filter H13 |
| (5) gas filtration | Adsorption filter cassette A14 (14 kg activated carbon) |

This excellent filter efficiency makes it possible to recirculate the **filtered air** and reduce energy costs.

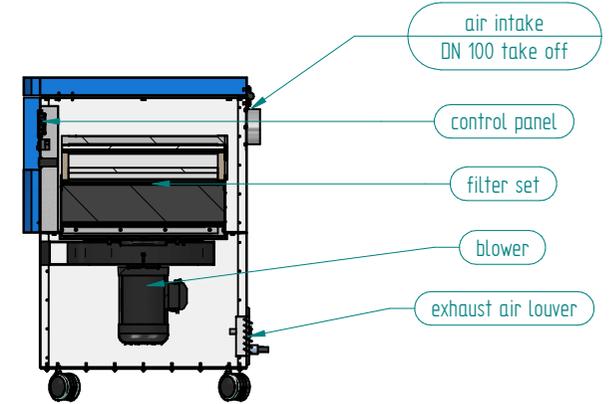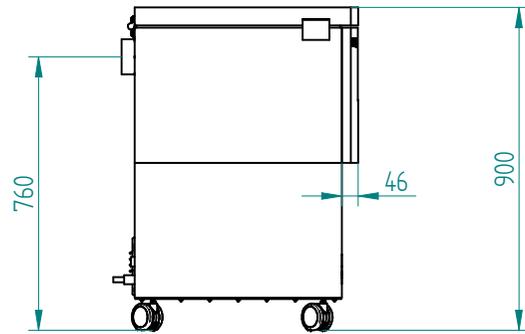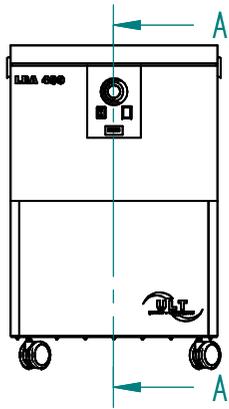


Schnitt A-A



- air intake
DN 100 take off
- control panel
- filter set
- blower
- exhaust air Louver

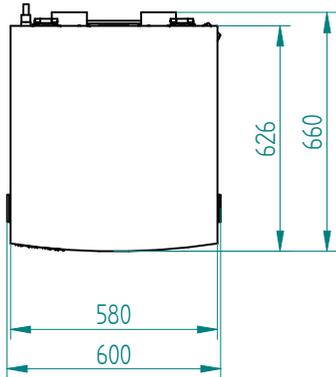

filter set consisting of:

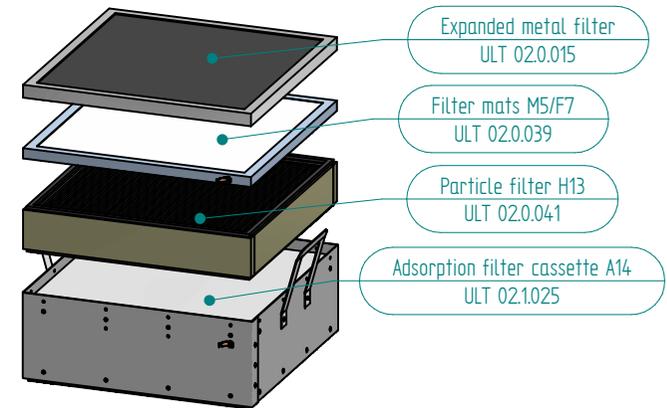

- Expanded metal filter
ULT 02.0.015
- Filter mats M5/F7
ULT 02.0.039
- Particle filter H13
ULT 02.0.041
- Adsorption filter cassette A14
ULT 02.1.025

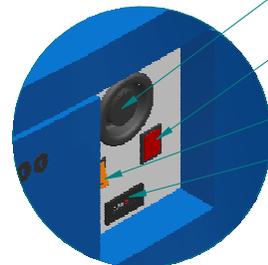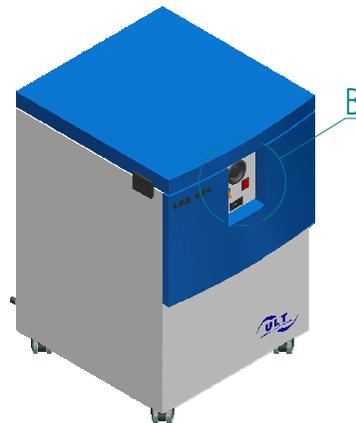

INZELHEIT B

- air flow controller
for blowers **ND17**
- loaded particle filter indicator
- on/off switch
- operating hours counter
optional

Weitere Maße sind dem 3D-Datensatz zu entnehmen. Für die Zeichnung behalten wir uns alle Rechte vor.
Other measure are to be taken from the 3D record. For the drawing we reserve ourselves all rights.

				ULT AG Am Gopelreich 1 D-02708 Lobau		designation LRA 400	
2013		date		name		drawing number:	
001		22.05.13		JSACZ		ULT 400_00_003_001	
issue	revision	day	name	verf.	Norm	scale: 1 : 15	

